

THE CURRENT EDITION OF THE STATE OF OHIO DEPARTMENT OF TRANSPORTATION CONSTRUCTION AND MATERIAL SPECIFICATIONS (DOT/CMS) INCLUDING ALL SUPPLEMENTS, SHALL GOVERN ALL MATERIALS AND WORKMANSHIP INVOLVED IN THE IMPROVEMENTS SHOWN ON THIS PLAN. IGNORE REFERENCES TO MEASUREMENT AND PAYMENT IN THE DOT/CMS UNLESS INDICATED OTHERWISE.

2. THE CONTRACTOR IS RESPONSIBLE FOR THE INVESTIGATION, LOCATION, SUPPORT, PROTECTION, AND RESTORATION OF ALL EXISTING UTILITIES AND APPURTENANCES WHENEVER SHOWN ON THESE PLANS OR NOT. THE CONTRACTOR SHALL EXPOSE ALL UTILITIES AND STRUCTURES PRIOR TO CONSTRUCTION TO VERIFY THE VERTICAL AND HORIZONTAL EFFECT ON THE PROPOSED CONSTRUCTION. THE CONTRACTOR SHALL CALL, TOLL FREE, THE OHIO UTILITIES PROTECTION SERVICE (1-800-362-2764) 48 HOURS PRIOR TO CONSTRUCTION AND SHALL NOTIFY ALL UTILITY COMPANIES WHO ARE NON-MEMBERS OF THE OHIO UTILITIES PROTECTION SERVICE. THE CONTRACTOR SHALL PROVIDE PROTECTION TO ALL UTILITIES IN THE VICINITY OF THEIR UNDERGROUND LINES.

3. CONTRACTOR SHALL OBTAIN A PERMIT FOR ALL CONSTRUCTION ACTIVITIES IN ACCORDANCE WITH LOCAL, STATE, & FEDERAL REGULATIONS.

4. THE CONTRACTOR IS TO PERFORM ALL INSPECTIONS AS REQUIRED BY THE OHIO EPA FOR THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT AND FURNISH FORMS REPRESENTATIVE WITH WRITTEN REPORTS.

5. THE CONTRACTOR IS REQUIRED TO VISIT THE SITE AND FURNISH FORMS HIMSELF CONCERNING ALL CONDITIONS AFFECTING THE SCOPE OF THE WORK. FAILURE TO VISIT THE SITE SHALL NOT RELIEVE HIM FROM ANY RESPONSIBILITY IN THE PERFORMANCE OF THE PROJECT.

6. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED FOR EXPENSES INCURRED DUE TO SOIL CONDITIONS, GROUNDWATER, AND/OR ROCK EXCAVATION. ALL OF THESE ITEMS SHALL BE INCLUDED IN THE PRICE BID FOR THE PROJECT.

7. THE COST OF ALL DETERMINING REQUIRED FOR THE CONSTRUCTION OF THIS PROJECT SHALL BE INCLUDED IN THE PRICE BID FOR THE PROJECT.

8. THE DIRECT OR INDIRECT DISCHARGE OR PUMPING OF UNFILTERED SEDIMENT-LADEN WATER INTO THE STORM DRAINAGE SYSTEM OR WATERCOURSE IS ILLEGAL AND PROHIBITED.

9. ANY WELL, WELL POINT, PIT, OR OTHER DEVICE INSTALLED FOR THE PURPOSE OF LOWERING THE GROUND WATER TO FACILITATE CONSTRUCTION SHALL BE PROPERLY ABANDONED IN ACCORDANCE WITH THE PROVISIONS OF THIS PLAN AS SET FORTH IN THE DIVISION OF NATURAL RESOURCES (DNR) AND/OR HIS REPRESENTATIVE.

10. ANY CONTRACTOR INSTALLING ANY WELL, WELL POINT, PIT, OR OTHER DEVICE USED FOR THE PURPOSE OF REMOVING GROUND WATER FROM AN ACQUIFER SHALL COMPLETE AND FILE A WELL LOG AND DRILLING REPORT FORM WITH THE OHIO DEPARTMENT OF NATURAL RESOURCES (DNR), DIVISION OF WATER, WITHIN 30 DAYS OF THE WELL COMPLETION IN ACCORDANCE WITH THE OHIO REVISED CODE SECTION 1521.01 AND 1521.05 IN ADDITION, ANY SUCH FACTORY IS COMPLETED IN ACCORDANCE WITH SECTION 1521.16 OF THE OHIO REVISED CODE, FOR COPIES OF THE NECESSARY WELL LOG, DRILLING REPORT, OR REGISTRATION FORMS, PLEASE CONTACT DIVISION OF WATER, OHIO DEPARTMENT OF NATURAL RESOURCES, PO BOX 12000, COLUMBUS, OHIO 43262, 614-6266771.

11. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE TO THE OWNER FOR THE PROTECTION, MAINTENANCE AND ABANDONMENT OF ANY WITHDRAWAL DEVICE USED IN CONSTRUCTION OF THIS PROJECT.

12. ALL DIMENSIONS ARE TO THE EDGE OF PAVEMENT AND/OR FACE OF CURB, UNLESS OTHERWISE NOTED.

13. ALL SITE SIGNGAGE, STRIPPING COLOR AND WIDTH SHALL BE PER THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.

14. ALL PAVEMENT SURFACES, WALKS, CURBS, ETC. SHALL BE SAWCUT BEFORE REMOVAL. IF DURING CONSTRUCTION, THE PAVEMENT, WALKWAY, CURB, ETC. IS DAMAGED BEFORE THE ORIGINAL SAWCUT, THE DAMAGED AREA SHALL BE RE-CUT TO NEAT LINES AS DIRECTED BY THE ENGINEER. PAYMENT FOR SAWCUTTING SHALL BE INCLUDED IN THE PRICE BID FOR THE PROJECT.

15. THE CONTRACTOR SHALL SAWCUT EXISTING PAVEMENT TO PROVIDE A SMOOTH VERTICAL FULL DEPTH BUTT JOINT BETWEEN THE EXISTING PAVEMENT OR CURB AND THE PROPOSED PAVEMENT. CONTRACTOR SHALL LOCATE SOUND PAVEMENT EDGE AND CUT AND TRIM PAVEMENT TO A NEAT LINE. INCLUDE THE COST OF PAVEMENT REMOVAL AND DISPOSAL IN THE PRICE BID FOR THE PROJECT.

GRADING NOTES

1. CONTRACTOR TO REMOVE TREES AND CLEAR AREAS AS NECESSARY TO PERFORM ALL SITE WORK INCLUDING GRADING AND UTILITY LOCATIONS PRIOR TO CONSTRUCTION.

2. PROTECTION OF EXISTING TREES AND VEGETATION: PROTECT EXISTING TREES AND OTHER VEGETATION INDICATED TO REMAIN IN PLACE AGAINST UNNECESSARY CUTTING, BREAKING OR SKINNING OF ROOTS, SKINNING OR BRUISING OF BARK, SMOTHERING OF TREES BY STOCKPILING CONSTRUCTION MATERIALS OR EXCAVATED MATERIALS WITHIN DRIP LINE. EXCESS ROOTS AND BRANCHES SHALL BE CUT AND REMOVED. ALL VEHICLES WITHIN DRIP LINE, PROVIDE TEMPORARY GUARDS TO PROTECT TREES AND VEGETATION TO BE LEFT STANDING.

3. ALL ELEVATIONS SHOWN ARE FINISHED GRADE ELEVATIONS.

4. SITE BUILDING PAD EXCAVATION AND CONSTRUCTION TO BE PER GEOTECHNICAL ENGINEER'S RECOMMENDATIONS. BUILDING PAD PREPARATION SHALL BEGIN BY CLEANING & STRIPPING UNSUITABLE MATERIAL FROM PAD SITE. THEN PLACE & COMPACT FILL MATERIAL TO MEET ALL GEOTECHNICAL ENGINEER'S AND ARCHITECT'S RECOMMENDATIONS. ALL BACKFILL MATERIAL MUST BE ACCEPTABLE TO THE GEOTECHNICAL ENGINEER.

5. ALL FILL UNDER PAVEMENT SHALL BE COMPACTED TO THE GEOTECHNICAL ENGINEER'S RECOMMENDATIONS.

6. THE CONTRACTOR IS RESPONSIBLE FOR BALANCING THE SITE EARTHWORK ON SITE. THE CONTRACTOR IS RESPONSIBLE FOR BURY/BORROW PITS AS NEEDED TO BALANCE THE SITE. GEOTECH AND ENGINEER MUST APPROVE AREAS PRIOR TO BURY/BORROW OPERATIONS. AS-BUILT OF BURY/BORROW PIT WILL BE REQUIRED AT COMPLETION OF CONTRACTOR WORK AND MUST BE SUBMITTED TO THE CONTRACTOR WITHIN 10 DAYS OF COMPLETION.

7. CONTRACTOR SHALL IMPLEMENT ALL SOIL AND EROSION CONTROL PRACTICES REQUIRED BY THE OHIO EPA.

8. ALL GROUND SURFACE AREAS THAT HAVE BEEN EXPOSED OR LEFT BARE AS A RESULT OF CONSTRUCTION AND ARE TO FINAL GRADE AND ARE TO REMAIN SO, SHALL BE SEEDED AND MULCHED AS SOON AS PRACTICAL IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, IF NO SPECIFICATIONS ARE SUPPLIED, USE DOTT ITEM 669.

9. CONTRACTOR TO LAYOUT BUILDING BASED ON ARCHITECTURAL FOUNDATION PLANS. SITE PLAN IS FOR CONCEPTUAL PURPOSES ONLY.

UTILITY NOTES

1. ALL DRAIN TILE AND STORM SEWERS DAMAGED, DISTURBED OR REMOVED AS A RESULT OF THE CONTRACTOR'S OPERATIONS SHALL BE REPLACED WITH THE SAME QUALITY PIPE OR BETTER, MAINTAINING THE SAME GRADIENT AS EXISTING. THE DRAIN TILE AND STORM SEWER SHALL BE REPLACED WITH 12" DIA. 15' MIN. STORM SEWER SYSTEM SHALL BE OUTLETTED INTO THE ROADWAY DITCH AS APPLICABLE. REPLACED DRAIN TILE/STORM SEWER SHALL BE LAID ON COMPACTED BEDDING EQUAL TO THAT OF THE EXISTING DRAIN TILE/STORM SEWER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE BACKFILL, PROTECTION, COST OF THIS WORK TO BE INCLUDED IN THE PRICE BID FOR THE PROJECT.

2. ALL EXISTING UTILITIES KNOWN TO EXIST HAVE BEEN SHOWN ON THESE PLANS IN THEIR APPROXIMATE LOCATION. PRIOR TO THE BEGINNING OF CONSTRUCTION OR EARTH MOVING OPERATIONS, THE CONTRACTOR SHALL VERIFY THE LOCATION AND DEPTH OF ALL UTILITIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION AND/OR RELOCATION OF ANY UTILITIES THAT MAY EXIST AND ARE NOT SHOWN.

3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE RELOCATION AND/OR PROTECTION OF ANY UTILITIES AS REQUIRED BY THE PLAN WITH THE OWNER OF THE AFFECTED UTILITY.

4. UTILITY POLES WITHIN INFLUENCE OF THE UTILITY OPERATIONS SHALL BE REINFORCED BY THE UTILITY COMPANY PRIOR TO CONSTRUCTION ACTIVITIES. NOTIFICATION OF THE UTILITY COMPANY PRIOR TO CONSTRUCTION SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

5. COMPACTED FILLS ARE TO BE MADE TO A MINIMUM OF THREE FEET ABOVE THE CROWN OF ANY PROPOSED SEWER PRIOR TO CUTTING OF TRENCHES FOR PLACEMENT OF SAID SEWERS. ALL FILLS SHALL BE CONTROLLED, COMPACTED, AND INSPECTED BY AN APPROVED TESTING LABORATORY OR AN INSPECTOR FROM THE APPROPRIATE GOVERNMENTAL AGENCY.

6. CONTRACTOR TO REPLACE ANY PAVEMENT OR UTILITIES DAMAGED WHICH ARE NOT SPECIFIED TO BE REMOVED ON THESE PLANS.

7. ALL CATCH BASINS PLACED WITHIN THE PAVEMENT SHALL HAVE HEAVY DUTY FRAMES AND GRATES AND CONFORM TO ADA REQUIREMENTS.

8. ADJUST ALL EXISTING CASTINGS AND CLEANOUTS WITHIN PROJECT AREA TO GRADE AS REQUIRED.

9. ALL CATCH BASINS WITH DEPTH GREATER THAN 4" SHALL BE PROVIDED WITH STEPS. STEPS SHALL MEET THE REQUIREMENTS OF DOTT ITEM 611.

10. ALL STORM AND SANITARY SEWER MANHOLES WITH A DEPTH GREATER THAN 4" SHALL BE PROVIDED WITH STEPS. STEPS SHALL MEET THE REQUIREMENTS OF DOTT ITEM 611.

11. DISTANCES SHOWN FOR BOTH SANITARY AND STORM SEWER PIPES ARE MEASURED FROM CENTER OF STRUCTURE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES FOR STORM AND SANITARY STRUCTURES ARE SHOWN TO THE CENTER OF STRUCTURE, UNLESS OTHERWISE NOTED.

12. IMMEDIATELY AFTER PLACEMENT OF ANY CONDUITS, THE CONTRACTOR SHALL CONSTRUCT THE END TREATMENTS REQUIRED BY THE PLANS AT BOTH THE OUTLET AND INLET ENDS. THIS SHALL INCLUDE HEADWALLS, CONCRETE RIP RAP, ROCK CHANNEL PROTECTION, SODDING, POURING BORDERS, MUDGING LIFT HOLES, ETC.

13. ALL PROPOSED STORM SEWERS, SURFACE OR OTHER DRAINAGE FACILITIES ARE TO BE PRIVATE AND MAINTAINED BY THE OWNER. EROSION CONTROL MEASURES MUST PROVIDE PROTECTION UNTIL COMPLETION OF THE PROJECT AND VEGETATIVE STABILIZATION.

14. THE CONTRACTOR IS TO CONSTRUCT CURBS, CATCH BASINS, DOWNSPOUTS, PIPING AND CONNECTIONS ETC. AS REQUIRED TO CONVEY THE ROOF AND PAVED SURFACE DRAINAGE TO THE EXISTING STORM SEWER SYSTEM ON THE WEST SIDE OF THE SITE.

15. ROOF DRAINS, FOUNDATION DRAINS AND ALL OTHER CLEAR WATER CONNECTIONS TO THE SANITARY SEWER SYSTEMS ARE PROHIBITED.


16. SITE CONTRACTOR SHALL PICK UP ALL UTILITIES MINIMUM DUTY OF FOUR FEET (4') UNLESS OTHERWISE NOTED. A MINIMUM OF 18" CLEARANCE SHALL BE MAINTAINED AT ALL WATERLINE CROSSINGS. SANITARY SEWER JOINTS SHALL CONFORM TO ASTM D-3212.

17. SANITARY SEWER SHALL BE SDR-35 OR APPROVED EQUIV. PIPE MUST MEET MINIMUM SLOPE REQUIREMENTS OF OHIO EPA. SANITARY SEWER SHALL BE 12" MINIMUM. MINIMUM DUTY OF FOUR FEET (4') UNLESS OTHERWISE NOTED. A MINIMUM OF 18" CLEARANCE SHALL BE MAINTAINED AT ALL WATERLINE CROSSINGS. SANITARY SEWER JOINTS SHALL CONFORM TO ASTM D-3212.

18. SANITARY SEWER SHALL BE TO BE DEEDED AS ROAD. 75%-100% CRUSHED. BEDDING TO BE MINIMUM OF 4" BELOW & 2" ABOVE THE PIPE.

19. ALL WATERLINE CROSSINGS SHALL MAINTAIN A VERTICAL SEPARATION OF 18" MINIMUM. SANITARY SEWER SHALL BE LOCATED A MINIMUM OF 18" BELOW WATERLINE AT ALL CROSSINGS. WATERLINE SHALL BE LOCATED A MINIMUM OF 10" HORIZONTALLY FROM ANY SANITARY SEWER. ALL MEASUREMENTS SHALL BE TAKEN FROM OUTSIDE OF SEWER PIPE TO THE OUTSIDE OF WATERLINE. ONE END OF THE CATCH BASIN IN THE UPHILL DRAINAGE SHALL BE LOCATED AT ALL CROSSINGS TO ENABLE BOTH JOINTS TO BE LOCATED AS FAR FROM SEWER AS POSSIBLE. ALL WATER SHALL HAVE A MINIMUM OF 4" OF COVER.

20. WATERLINE SHALL BE DUCTILE IRON PIPE, AWWA C111, PRESSURE CLASS 350 OR PIPE OF EQUIV. COOPER.

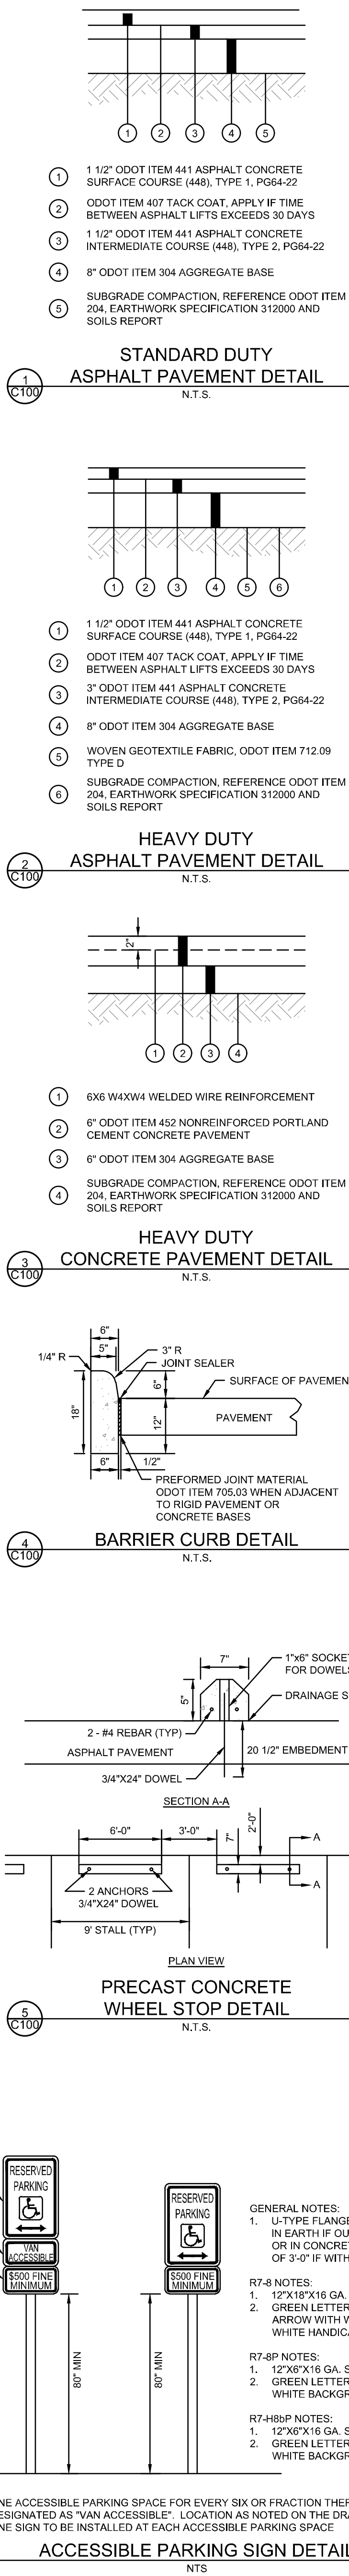

6&6 W1.4 W1.4 WWR

WALK TYPICAL SECTION

CONTROL JOINT

EXPANSION JOINT

WALK EDGE AT BUILDING LINE

WALK EDGE AT LAWN AREA

FLUSH CURB AT PAVEMENT EDGE

6" HIGH CURB AT PAVEMENT EDGE

NOTES:

1. INSTALL EXPANSION JOINTS AT 50' OC MAXIMUM AND WHERE SLAB ABUTS STRUCTURES. WHERE NEW WALK ABUTS ADJOINING WALK, SAWCUT EXISTING WALK TO NEAREST JOINT AND INSTALL EXPANSION JOINT. EXPANSION JOINTS SHALL BE 1/2" WIDE BY DEPTH OF SLAB. SEAL ALL EXPANSION JOINTS.
2. INSTALL CONTROL JOINTS AT AS SHOWN ON PLANS AND 12' OC MAXIMUM. CONTROL JOINTS SHALL BE 3/8" WIDE BY 1 1/2" DEEP AND TOOKED. SAWED JOINTS ARE NOT PERMITTED.
3. WALK SHALL HAVE A MINIMUM CROSS SLOPE OF 1.00%. MAXIMUM CROSS SLOPE OF 2.00%.
4. WATER AND UTILITY BOXES IN THE WALK AREA SHALL BE ADJUSTED FLUSH WITH THE FINAL SURFACE.
5. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL DETAIL AT ALL BUILDING DOORS.
6. JOINTING PLANS MUST BE SUBMITTED FOR APPROVAL.

7 C100 EXTERIOR CONCRETE SLAB WALK DETAIL N.T.S.

64" MAX.

10:1 MAX.

4" MIN.

6" MIN.

13:1 MAX. SLOPE

24" WIDE 6" THICK CONCRETE

1'6"

RAMP

LANDING

SECTION A-A

NOTES:

1. WHILE RAMPS MAY BE SKEWED TO THE CROSSWALK, THE ENTIRE LOWER LANDING MUST FALL WITHIN THE CROSS WALK THAT RAMP SERVES AND CANNOT BE LOCATED IN TRAVELED LANE OF OPPOSING TRAFFIC.
2. THE COUNTER SLOPE OF THE GUTTER OR AT THE FOOT OF A CURB RAMP, LANDING OR THE EDGE OF THE ADJACENT PAVEMENT AT GUTTER AND SURFACE SLOPES THAT MEET GRAD BREAKS SHALL ALSO BE FLUSH.
3. THE BOTTOM EDGE OF THE RAMP SHALL BE PLANES PERPENDICULAR TO THE LANDING.
4. THE EDGE OF THE CURB SHALL BE FLUSH WITH THE EDGE OF THE ADJACENT PAVEMENT AT GUTTER AND SURFACE SLOPES THAT MEET GRAD BREAKS SHALL ALSO BE FLUSH.
5. RAMP LANDINGS SHALL BE 4" MIN. X 6" MIN. 64.1 OR FLATTER CROSS SLOPE AND RUNN SLOPE.
6. **DETECTABLE WARNINGS:** INSTALL DETECTABLE WARNINGS ON EACH CURB RAMP WITH APPROPRIATE MATERIALS, AS SHOWN IN SEPARATE DETAIL. INSTALL THESE PROPRIETY PRODUCTS AS MANUFACTURER'S WRITTEN INSTRUCTIONS.
7. **DRAINAGE:** CONTRACTOR TO ENSURE THE BASE OF EACH CONSTRUCTED CURB RAMP ALLOWS FOR PROPER DRAINAGE, WITHOUT EXCEEDING ALLOWABLE CROSS SLOPE OR SLOPES. VERTICAL CHANGE IN LEVEL EXCEEDS 1/4" BETWEEN THE 1) PAVEMENT AND GUTTER 2) GUTTER AND RAMP. ARE NOT ALLOWED.
8. **SURFACE TEXTURE:** TEXTURE CONCRETE SURFACES BY COARSE BROOMING TRANSVERSE TO THE RAMP SLOPES TO BE ROUGHER THAN ADJACENT WALK.
9. **JOINTS:** PROVIDE EXPANSION JOINTS IN THE RAMP AS EXTENSIONS OF WALK JOINTS AND CONSISTENT WITH ITEM 608.03 REQUIREMENTS FOR A NEW CONCRETE WALK. PROVIDE A 705.03 EXPANSION JOINT FILLER AROUND THE EDGE OF RAMPS BUILT IN EXISTING CONCRETE WALKS. LINES SHOWN ON THIS DRAWING INDICATE THE RAMP EDGES AND SLOPE CHANGES AND DO NOT NECESSARILY INDICATE JOINTS.

"WHERE POSSIBLE, POUR RAMP AREA INTEGRAL WITH THE CURB, OTHERWISE USE 6" THICK WALK."

1 C100 CURB RAMP DETAIL - PERPENDICULAR WITH FLARED SIDES N.T.S.

NOTES:

GENERAL

1. DETECTABLE WARNINGS ARE A DISTINCTIVE SURFACE PATTERN OF TRUNCATED DOMES WHICH ARE DETECTABLE BY CANE OR UNDERFOOT TO ALERT PEOPLE WITH VISION IMPAIRMENTS OF THEIR APPROACH TO STREETS AND HAZARDOUS DROP-OFFS.

PLACEMENT

1. DETECTABLE WARNINGS ARE TO BE INSTALLED AT ANY LOCATION WHERE PEDESTRIANS MIGHT CROSS PATHS WITH VEHICULAR TRAFFIC LANES, SUCH AS THE BASE OF CURB RAMPS OR AT BLENDED CURBS. A 24" STRIP OF DOMES IS TO BE INSTALLED FOR THE FULL WIDTH OF THE RAMP OR WALK.
2. THE DEPTH OF CONCRETE UNDERNEATH DETECTABLE WARNING PRODUCTS SHALL BE A MINIMUM OF 4".

PRODUCTS & COLORS

1. COLOR OF THE DETECTABLE WARNINGS SHOULD CONTRAST WITH SURROUNDING CONCRETE WALK AND RAMP. BLACK IS NOT AN ACCEPTABLE COLOR. APPROVED PRODUCTS AND GUIDANCE ON COLOR MAY BE FOUND ON THE ODOT OFFICE OF ROADWAY ENGINEERING SERVICES' DETECTABLE WARNINGS APPROVED LIST. INSTALL PRODUCTS AS PER MANUFACTURER'S PRINTED INSTRUCTIONS.

1.6" MIN. 2.4" MAX.

0.9" MIN. 1.4" MAX.

SQUARE PATTERN, PARALLEL ALIGNMENT


DIRECTION OF RAMP

HEIGHT AND DIAMETER

50% TO 65% OF BASE DIAMETER

0.9" MIN. 1.4" MAX.

2 C100 DETECTABLE WARNINGS DETAIL N.T.S.

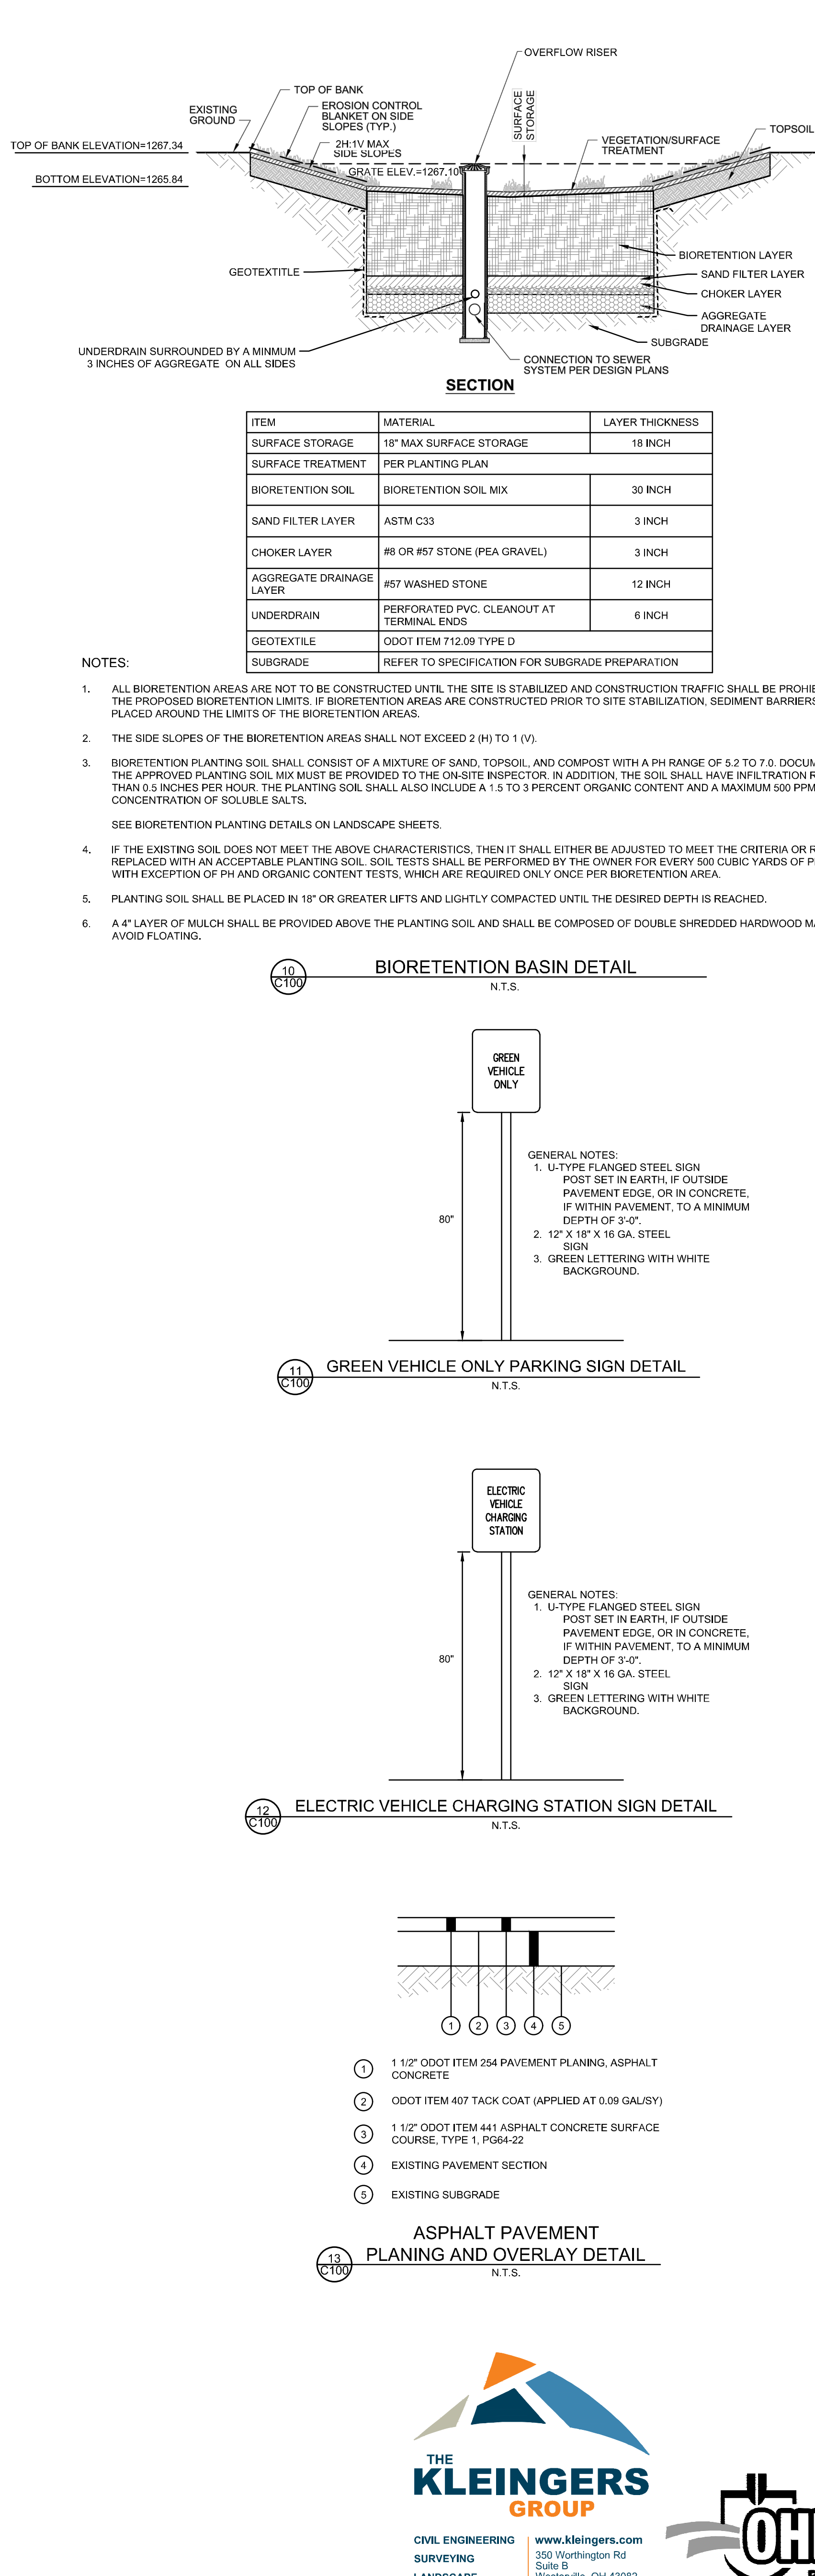

SHS

Plum Street, Ste 700
Cincinnati, Ohio 45202

1086 N. 4th Street, Ste 111
Columbus, Ohio 43201

223 Fairfield Avenue, Ste 10
Bellevue, Kentucky 41073

UNITED LOCAL SCHOOL DISTRICT
UNITED LOCAL NEW K-12 SCHOOL
8143 State Route 9, Hanoverton, OH 44423

UNITED LOCAL SCHOOL DISTRICT
8143, State Route 9, Hanoverton, OH 44423

[illegible]

DATE	02-15-22
COMM NO.	2021094.0

C100

C100
